



2VGR45 300A

B22-E6 p

DATA SHEET

release. c - Revision 07-2014



Voltage	Frequency	Absorbed Power	Absorbed Current	Capacitor	Airflow	Rotation speed	Acoustic level	Rotation	Operational Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	181	0,79	6,0	2625	2650	73	L	-20°C / +70°C
230	60	261	1,14	6,0	2880	2940	76	L	-20°C / +70°C
230	50				1545 CFM				-4°F / 158°F
230	60				1695 CFM				-4°F / 158°F





dBA : free blowing

ErP 2013

OK

ErP 2015


OK

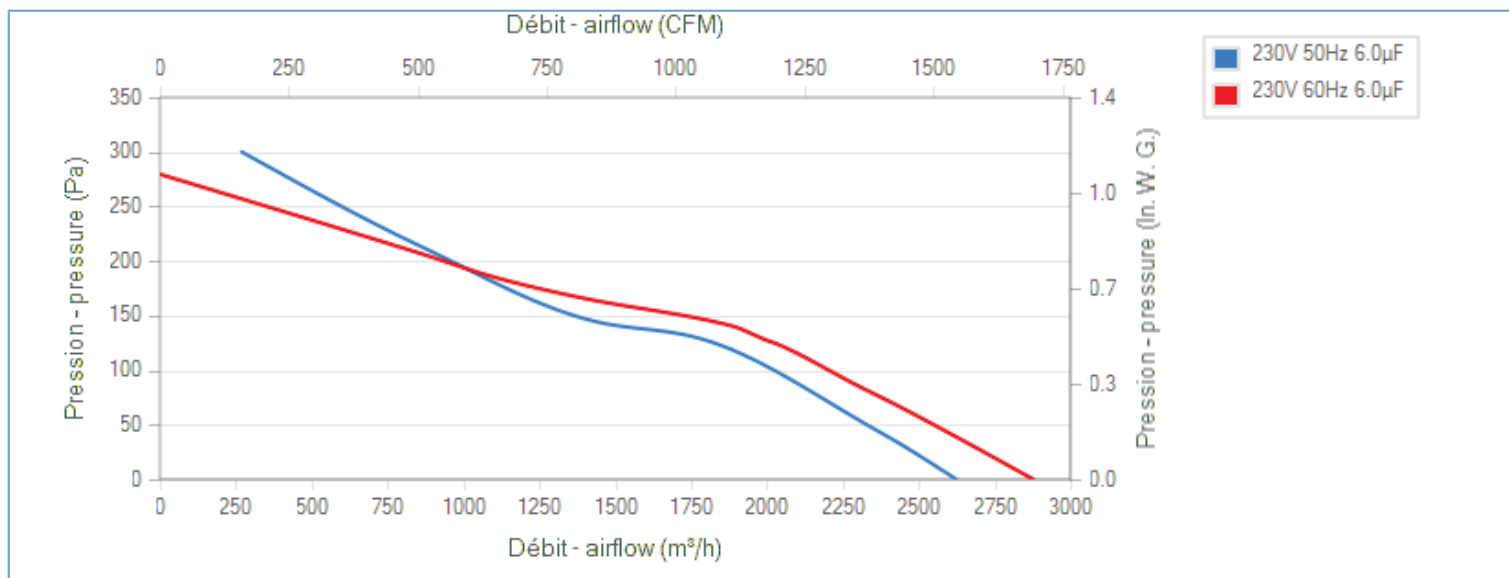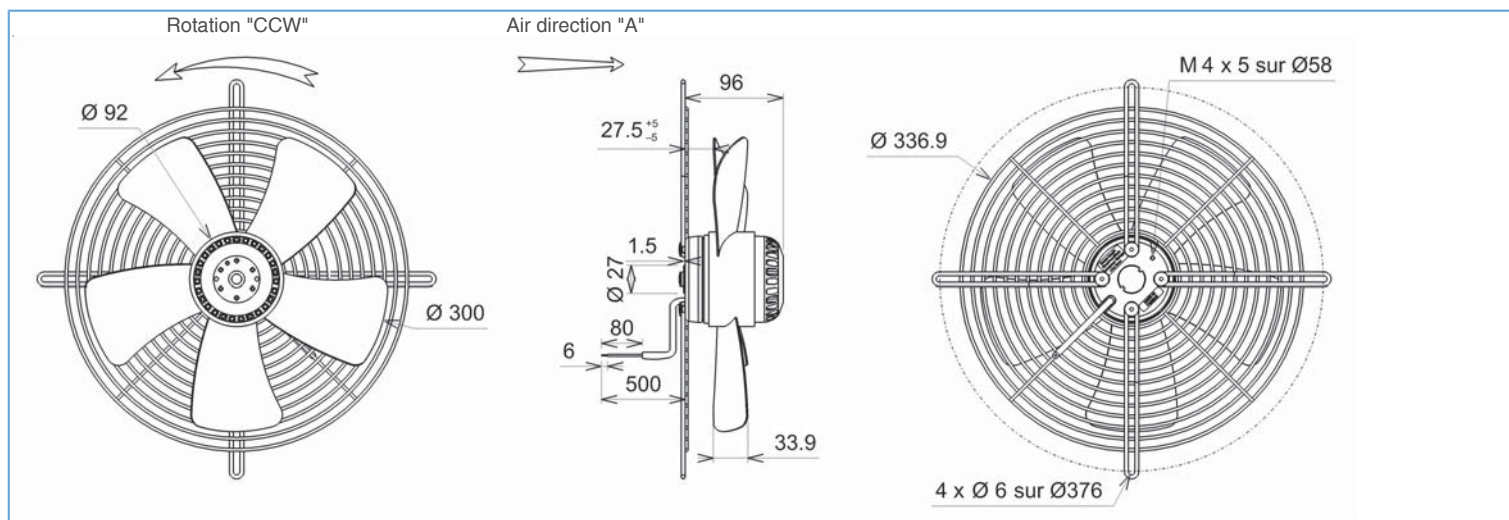

Tested with ECOFIT ring

Description

- .Weight : 3,4 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Rotor and impeller : black paint
- .Finger guard : black paint

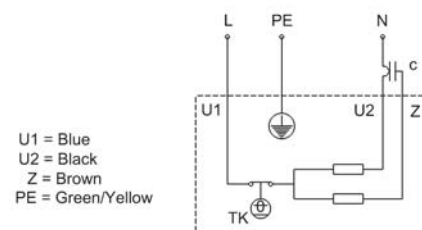



2VGR45 300A

B22-E6 p

DATA SHEET

release. c - Revision 07-2014

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,216	kW ⁽¹⁾
Airflow	1749	m ³ /h ⁽¹⁾
Pressure	131	Pa ⁽¹⁾
Rotation speed	2520	RPM ⁽¹⁾

(1) at optimal efficiency point

	Actual	Request 2013	Request 2015
Overall efficiency (η)	29,6	25,5	29,5
Efficiency grade	40	36	40
Installation category	A		
Efficiency category	static		
Variable speed drive	No		
Specific ratio	1,00		

Designed for regular application according ErP
directive EU 2009/125/EC



Accessories

Capacitor for 50Hz	19016
Capacitor for 60Hz	19016
Connecting box	39658
Connector	09172

Measurement setup

16086 VIROLE V300 RONDE

Documents

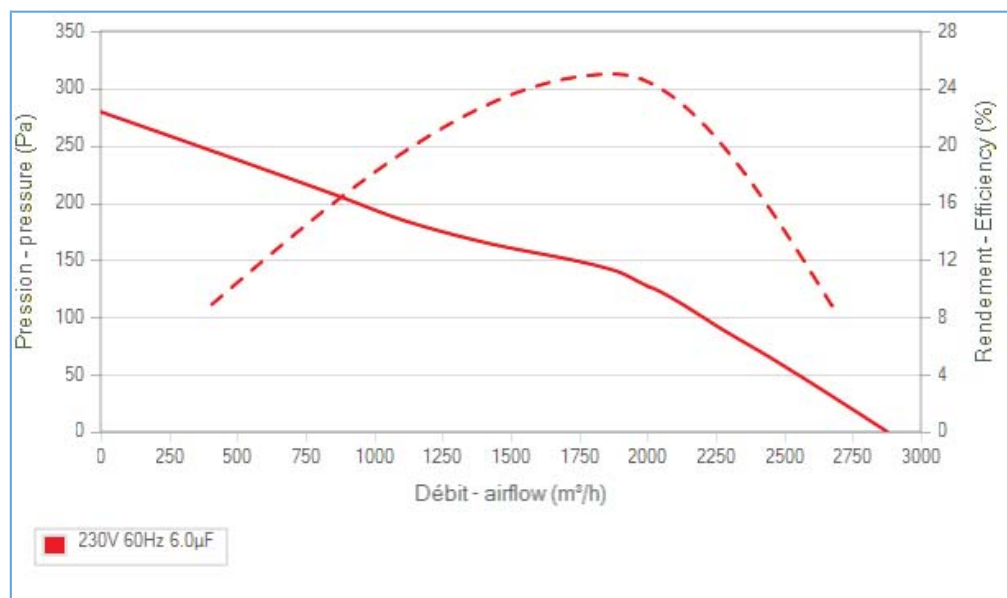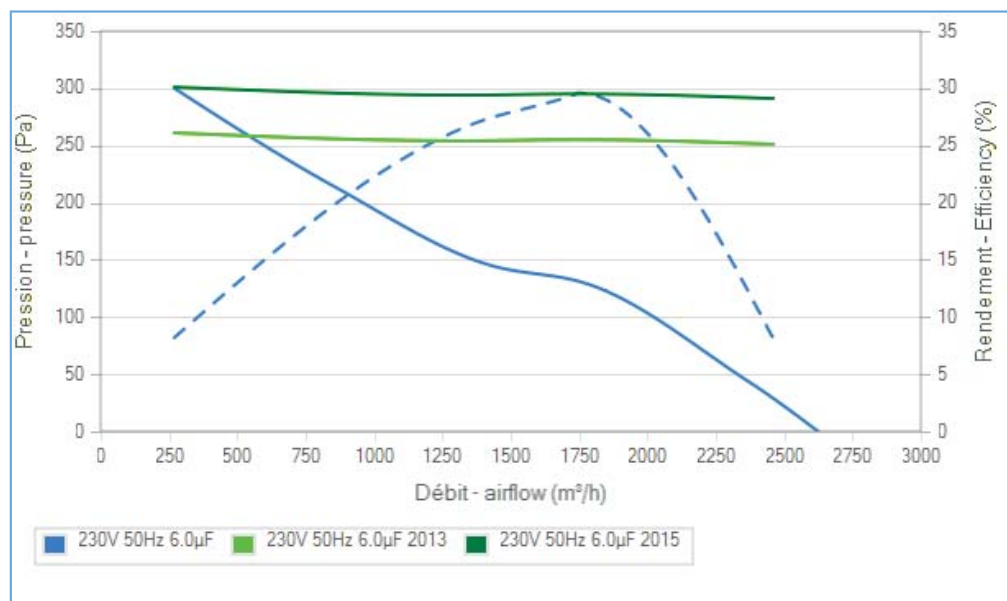Manuel d'utilisation
www.ecofit.com/site/normesOperating and recycling manual
www.ecofit.com/anglais/normesA041865
2RS945CN